

ARX 26-2C

LIGHT TANDEM VIBRATORY ROLLER

EU STAGE IIIA / U.S. EPA TIER 4 INTERIM

APPLICATIONS

- Small and medium construction sites
- Road maintenance
- City street repairs
- Confined work spaces
- Pathways
- Playgrounds, golf courses



PRODUCTIVITY

Smooth rolling

No sudden starts and stops during machine operation.

Compaction performance

Varied machine sizes ensure proper fits for the application and jobsite.

ERGONOMICS

The operator platform

is designed for comfort, ensuring a pleasant experience no matter the duration of the shift.

The operator station offers 360° all-around machine visibility from the seat to maximize safety on the jobsite.

SERVICEABILITY

Low downtime

Robust design that protects components.

Reduced maintenance

Easy-to-reach maintenance points.

SUSTAINABILITY

ECOdrops

Improved efficiency, reduced use of fluids.

Advanced technologies

Machine usage controlled to bring efficiency, productivity – and enable precise documentation.

OPTIONAL EQUIPMENT

- Additional documentation printed
- Additional lights for hard canopy
- Additional Lights for ROPS
- Additional Lights for ROPS with Beacon
- Additional lights for ROPS/FOPS
- Additional lights for ROPS/FOPS with beacon
- Additional mirror
- Ammann Traction Control (ATC)
- AmmannCare Gold
- AmmannCare Silver
- Back-up alarm
- Back-up alarm adaptive
- Canvas canopy ROPS mounted
- CE conformity
- Central lifting point
- Certificate of origin
- Color scheme customer
- Compaction Measuring System ACE^{force}
- Drive lever additional left
- Edge cutter 45° (front right)
- Frame ROPS
- Hard canopy ROPS mounted
- Hard driving
- Hydraulic oil biodegradable
- Infrared thermometer
- Maintenance kit 500h
- Maintenance kit 250h
- Maintenance kit 50h
- Overseas shipping preparation
- Registration plate holder
- Road lights
- Road lights incl. turn signals
- Scrapers combi tiltable
- Seat activation warning switch
- Seat belt 3"
- Seat options armrests
- Seat options seat heating
- Telematics ServiceLink Light
- Telematics ServiceLink Plus
- Toolset
- Transport accessories
- Warning beacon green LED
- Warning beacon green LED for ROPS/FOPS
- Warning beacon LED for hard canopy
- Warning beacon LED for ROPS
- Warning beacon LED green for hard canopy
- Warning beacon LED ROPS/FOPS
- Warning beacon permanently activated
- Water tank lock


STANDARD EQUIPMENT

- 1 amplitude / 2 frequencies
- Ammann color design and decals
- Articulation joint with oscillation and offset
- AVC - Automatic Vibration Control
- Operator station with one drive lever (RH)
- One non-split drum / 4 tyres in rear
- Front and rear drive / front vibration
- Emulsion-spraying
- Open platform with safety handles
- Electronic drive lever
- Pressure water sprinkling with interval switch, 2 stage filtration
- Multi-functional display for machine overview
- Slideable and horizontally adjustable driver's seat
- Fixed scrapers
- Standard hydraulic oil
- Telematics ready
- On-board diagnostics
- Battery disconnection switch

AMMANN

ARX 26-2C

StIIIA/T4i

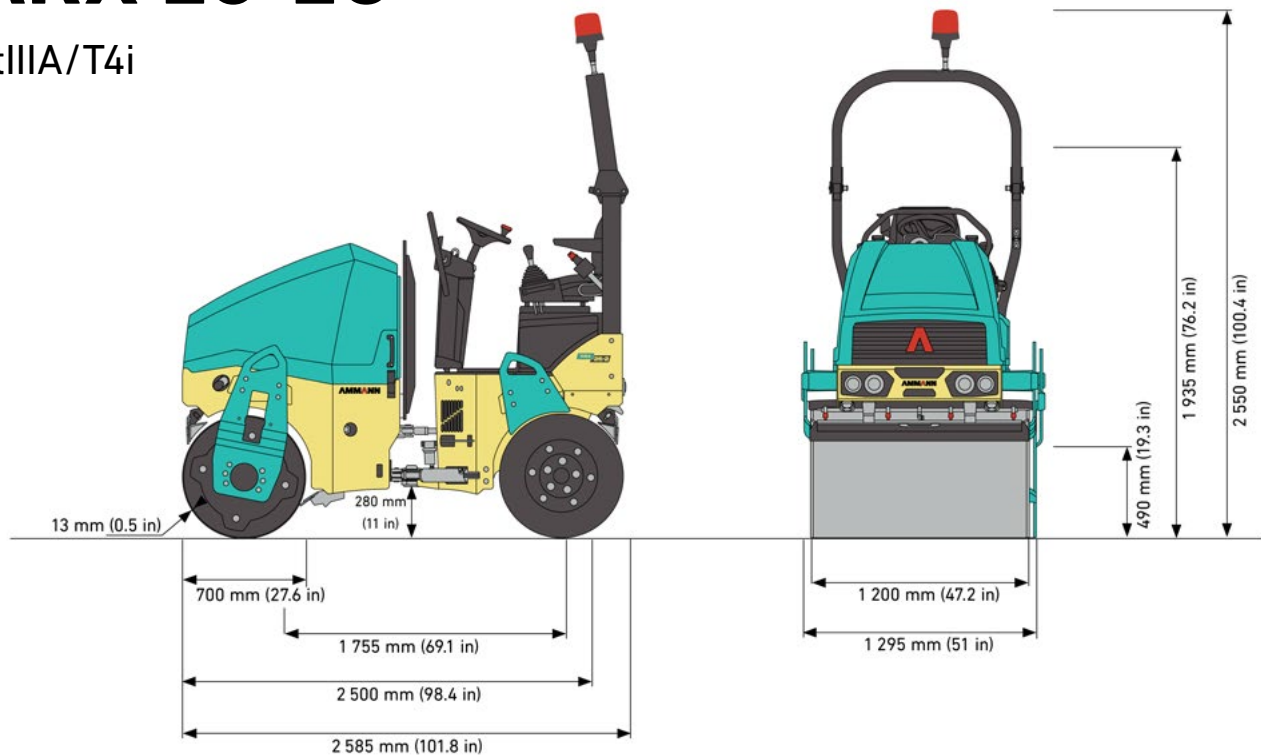

WEIGHT & OPERATING CHARACTERISTICS

OPERATING WEIGHT CECE	2 300 kg (5,071 lb)
OPERATING WEIGHT MAX.	2 500 kg (5,512 lb)
STATIC LINEAR LOAD AVG.	9,8 kg/cm (54.9 lb/in)
MAX. WORKING SPEED	11 km/h (6.8 MPH)
GRADEABILITY WITHOUT VIBRATION	35%
GRADEABILITY WITH VIBRATION	35%
TURNING RADIUS (INNER)	2 400 mm (94.5 in)

ENGINE

MANUFACTURER	Kubota
ENGINE TYPE	D1803-M-DI
ENGINE SPEED	2100 / 2400 rpm
POWER OUTPUT ISO 3046	24,8 kW / 33,3 HP
EMISSION STAGE	EU Stage IIIA / U.S. EPA Tier 4 interim

COMPACTION FORCES

AMPLITUDE I	0,5 mm (0.020 in)
AMPLITUDE II	0,5 mm (0.020 in)
FREQUENCY I	58 Hz (3,480 vpm)
FREQUENCY II	66 Hz (3,960 vpm)
CENTRIFUGAL FORCE I	35 kN (7,868 lbf)
CENTRIFUGAL FORCE II	42 kN (9,442 lbf)

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	35 l (9.2 gal)
WATER TANK CAPACITY	190 l (50.2 gal)
ANTI-ADHESIVE TANK	12 l (3.2 gal)
TYPE OF WATERING	Pressure
HYDRAULIC TANK CAPACITY	28,5 l (7.5 gal)
STEERING ANGLE	±30°
OSCILLATION ANGLE	±6,5°
BATTERY VOLTAGE	12 V
BATTERY CAPACITY	77 Ah
NUMBER OF WHEELS	4 pcs
SIZE OF TIRES	9.5/ 65-15
WHEEL LOAD	280 kg (617 lb)

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

ROCKFILL	N/A
SAND / GRAVEL	220 mm (8.7 in)
MIXED SOILS	150 mm (5.9 in)
SILT	N/A
CLAY	N/A
STABILISATION	100 mm (3.9 in)
ASPHALT	80 mm (3.1 in)